

NEW RoughDeck® RP

Rodent Protection



Specifications

End Load Capacity:

100% full scale at 5,000 lb
80% full scale at 10,000 lb

Cable Length:

20 ft (6.1m) for connecting junction box to indicator

Note: 1/2" conduit fitting supplied, conduit for homerun cable to be supplied by customer

Threaded Eyebolt:

Hole (1/2-20NF) located in center of deck for easy lifting

Warranty (limited):

RoughDeck RP weldment five years, load cells two years, all other components one year


Approvals:

NTEP CC 92-001, Class III 5,000d

Standard Features

- Heavy-duty industrial design
- Structural steel channel frame
- Four NTEP Certified alloy steel, shear beam load cells
- 20ft SURVIVOR® EL147HE hostile environment load cell cable with 1/2in conduit fitting (conduit for homerun cable to be supplied by customer)
- TuffSeal® JB4SS stainless steel, NEMA Type 4X junction box with signal trim card
- Top-access junction box with additional top access cover for accessing load cell cables into scale conduit
- Rugged diamond deck safety treadplate
- 4 adjustable stainless steel SUREFOOT™ support feet

APPROVALS

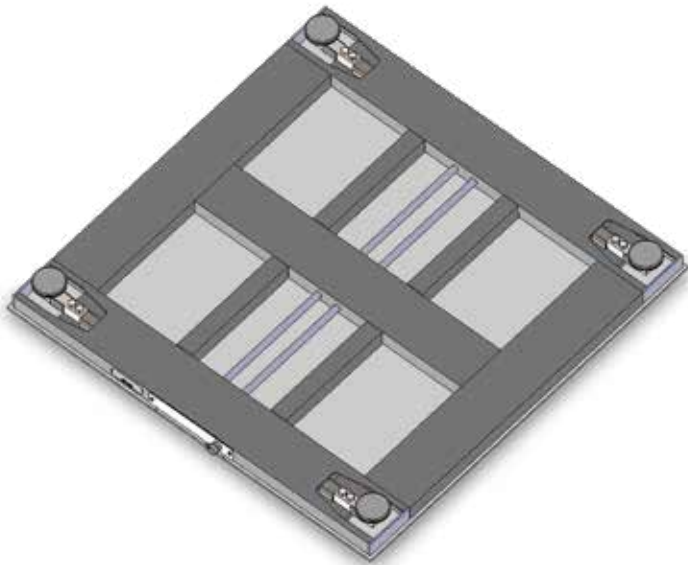

Part Number/Price

Part #	Size (W x L x H)	Capacity	Est. Weight	Price
195834	4 ft x 4 ft x 3.5 in	5,000 lb	375 lb	Consult
195835	4 ft x 4 ft x 3.5 in	10,000 lb	375 lb	Consult
195836	5 ft x 5 ft x 3.5 in	5,000 lb	541 lb	Consult
195837	5 ft x 5 ft x 3.5 in	10,000 lb	696 lb	Consult